



Machines

Vibratory Double Drum Roller ARW 65

www.ammann-group.com





One roller solves multiple tasks


A universal machine

The economical, unique and multiple task roller, model ARW 65, can be used for soil compaction as well as for asphalt consolidation.

Two performance levels are available by a simple adjustment of the amplitude:

The large amplitude is used for soil and gravel compaction.

With the small amplitude the unit can be used on black top and bituminous surfaces.

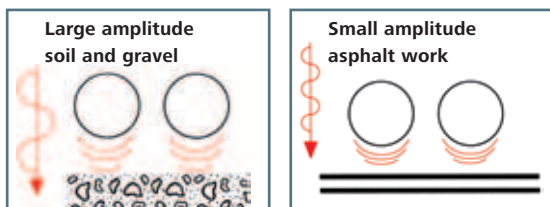

The roller is equipped with alternative versions of powerful and reliable Hatz Diesel Engines.

Hatz Supra 1 D 42 S is available with crank- or electric start. To avoid any possible down time in case of battery failure the engine always can be started manually.

Hatz 1 B 40 available with convenient electric start and economical manual rope start.

Fully hydraulic

Vibration- and drive components are fully hydraulic. To keep service intervals to a minimum the unit has no mechanical fast wearing parts such as v-belts, clutch etc. The hydraulic drive ensures variable speed adjustment and smooth starting/breaking action.

Entire side-clearance

No more additional and time consuming work on edges and in confined areas:

The side clearance on both sides allows compaction work extremely close to curbstones, retaining walls and other obstacles.

Electric start:

The more powerful Hatz 1 B 40 version carries electric start as a standard feature. E-start is definitely a recommended option on the Hatz 1 D 42 S version.



Safety is our highest priority:

Guide handle complete with dead man's handle hydraulic parking brake reduced reverse speed of 2.5 km/h.



Fully hydraulic and much more

A condensed overview of benefits and advantages

Air-cooled Hatz Diesel engine with integrated Oil Alert System powerful, service friendly and low emissions values


Sturdy protection frame with central lifting point

Large Water tank (60L) made of wear resistant polyurethane water sprinkler system for compaction work on bituminous material

The ergonomic and low vibration handle is foldable for easy transport. The integrated dead man's handle ensures maximum operator safety

Hydrostatic lever for forward and reverse as well as centrifugal force adjustment

Standard feature: integrated hydraulic parking brake

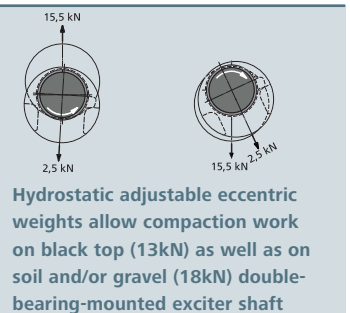


Two hydraulic pumps to power drive and vibration eliminate an expensive and high wearing V-Belt system plus centrifugal clutch

A powerful hydraulic motor drives the vibratory shaft

Two scraper bars for each drum to ensure an absolute clean drum when working on asphalt

Hydrostatic drive motors are installed in both drums

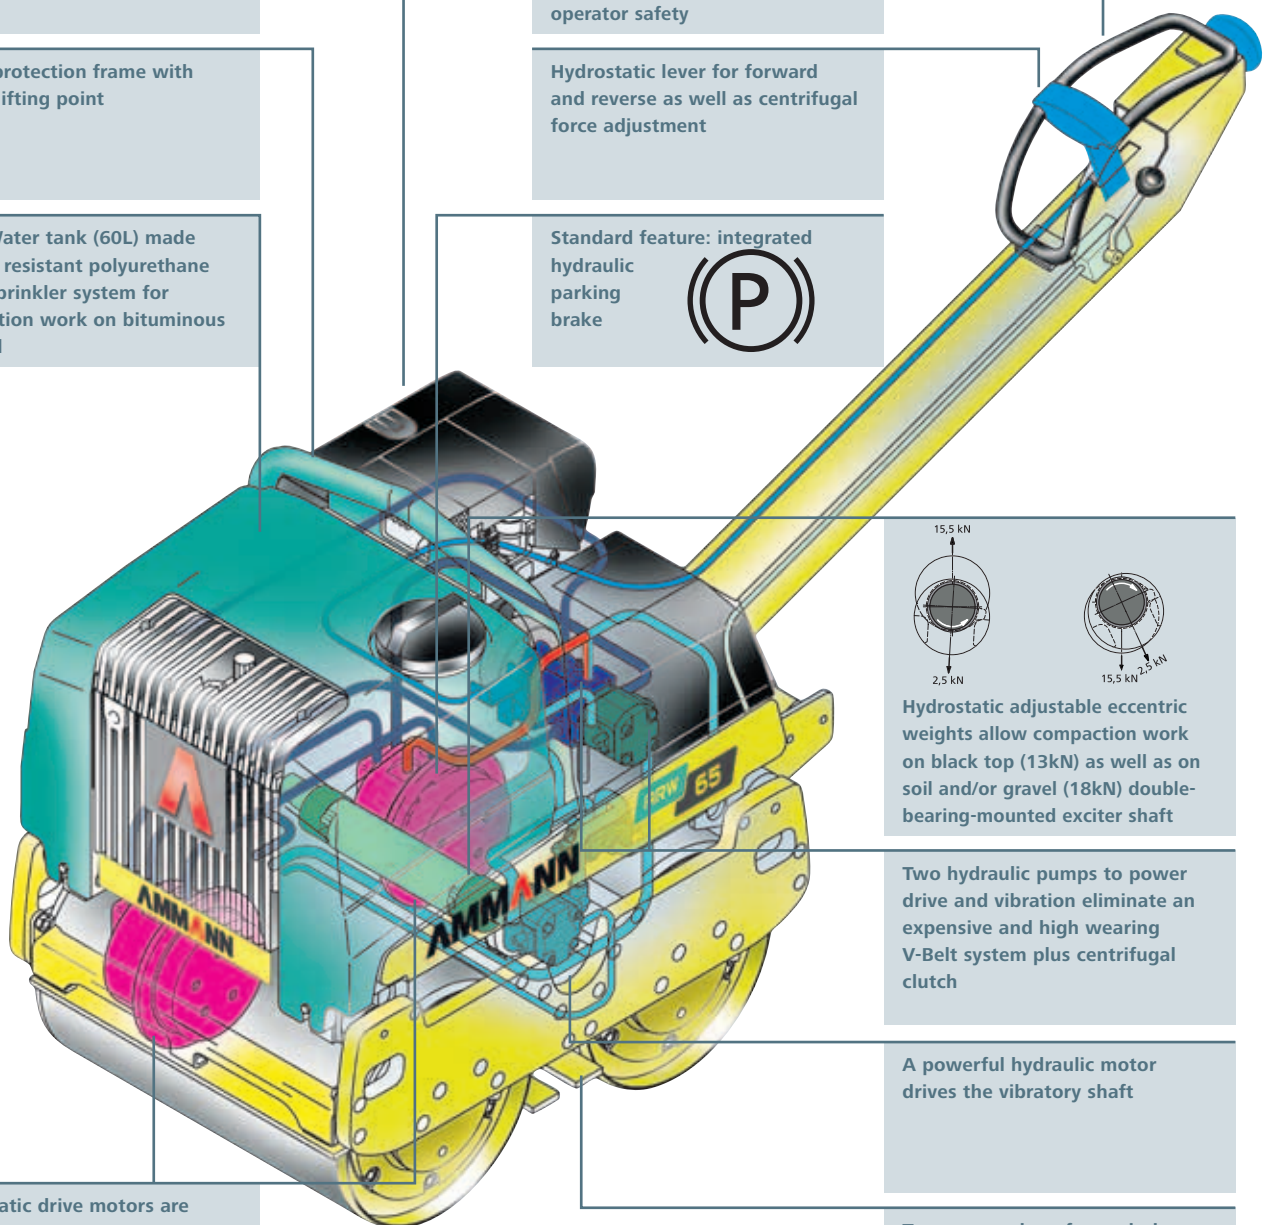




Technical Data

		ARW 65 Hatz 1 D 42 S	ARW 65 Hatz 1 B 40
Weight/Measurements			
operating weight CECE	kg (lb)	720 (1584)	700 (1543)
net weight, standard version	kg (lb)	695 (1532)	690 (1521)
net weight, electric starter	kg (lb)	738 (1623)	690 (1521)
working width	mm (in)	650 (26)	650 (26)
linear pressure	kg/cm (lb/in)	5 (28)	5 (28)
Drive		hydrostatic	hydrostatic
diesel engine		Hatz 1D42 S	Hatz 1B40
performance	HP (kW)	8,3 (6,1)	8,6 (6,3)
travel speed, infinitely forward	km/h (mph)	4 (2,5)	4 (2,5)
travel speed, infinitely reverse	km/h (mph)	2,5 (1,6)	2,5 (1,6)
Vibration		hydrostatic	hydrostatic
centrifugal force	kN (lbf)	13/18 (2,9/4)	13/18 (2,9/4)
centrifugal force per cm drum width	N/cm (lb/in)	100/138 (57/79)	100/138 (57/79)
frequency	Hz (vpm)	55 (3300)	55 (3300)
max. gradeability with/without vibration	%	25/45	25/45
Capacities			
water	l (gal)	60 (13)	60 (13)
hydraulic oil	l (gal)	20 (4,4)	20 (4,4)
fuel	l (gal)	5 (1,1)	5 (1,1)
fuel consumption	l/h (gal/hr)	1,7 (0,4)	1,2 (0,3)
electric starter		Option	serienmäßig
Optional equipment			
operating hour meter		x	x
front protection frame		x	x
Compaction performance*			
large/small amplitude			
sand/gravel	cm (in)	30/25 (11,8/9,8)	30/25 (11,8/9,8)
cohesive soil	cm (in)	20/15 (7,9/5,9)	20/15 (7,9/5,9)

*depending on ground condit

Specifications are subject to changes due to technical improvements

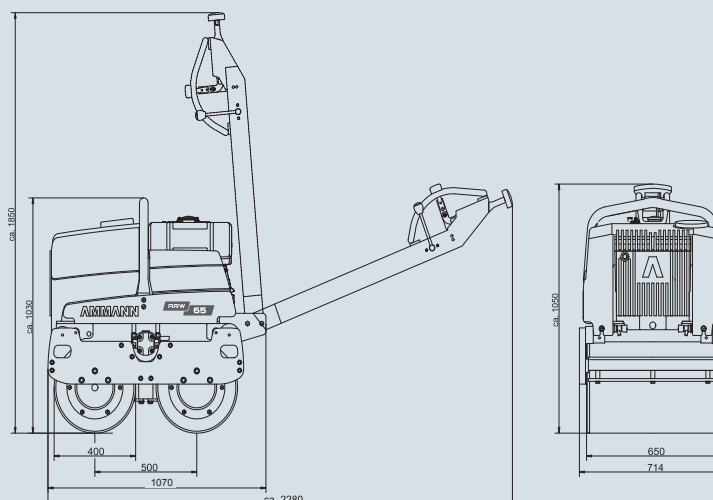

Ammann distribution companies

Germany
Ammann Verdichtung GmbH
D-53773 Hennef
Tel +49 22 42 880 20
Fax +49 22 42 88 02 59
info.avd@ammann-group.com

France
Ammann France SAS
F-94046 Créteil/Cedex
Tel +33 1 45 17 08 88
Fax +33 1 45 17 08 90
info.afr@ammann-group.com

United Kingdom
Ammann Equipment Ltd.
Bearley Stratford upon Avon
GB-Warwickshire, CV37 8XY
Tel +44 1789 414 525
Fax +44 1789 414 495
info.ael@ammann-group.com

USA
Ammann America Inc.
Ponte Vedra, Florida 32082, USA
Tel +1 904 543 1691
Fax +1 888 266 1210
info@ammann-america.com

Russia
Ammann Russland o.o.o.
RU-129343 Moscow
Tel +7 495 933 35 61
Fax +7 495 933 35 67
info.aru@ammann-group.com

Brasil
Ammann do Brasil
Gravataí -RS- Brasil 94180 - 452
Tel +55 51 9315 3099
info.abr@ammann-group.com

South Africa
Ammann Construction Machinery
South Africa
229 Hull Road, Rynfiel, Benoni
Tel +27 11 849 3939
Fax +27 11 849 8889

United Arab Emirates
Ammann NME / Dubai
Dubai
Tel +971 4 299 14 49 | 7
Fax +971 4 299 14 49
info.nme@ammann-group.com

Ammann manufacturing companies

Switzerland
Ammann Schweiz AG
CH-4901 Langenthal
Tel +41 62 916 61 61
Fax +41 62 916 64 03
info.aag@ammann-group.com

Germany
Ammann Verdichtung GmbH
D-53773 Hennef
Tel +49 22 42 880 20
Fax +49 22 42 88 02 59
info.avd@ammann-group.com

Czech Republic
Ammann Czech Republic a.s.
CZ-54901 Nové Město nad Metují
Tel +420 491 476 111
Fax +420 491 470 405
info.acz@ammann-group.com

Ammann Spare Parts
Tel +41 62 916 66 66
Fax +41 62 916 6804
spareparts.machines@ammann-group.com

